


# CAA-M



## BIMETALLIC CONNECTORS

*copper palm fixing aluminium barrels*

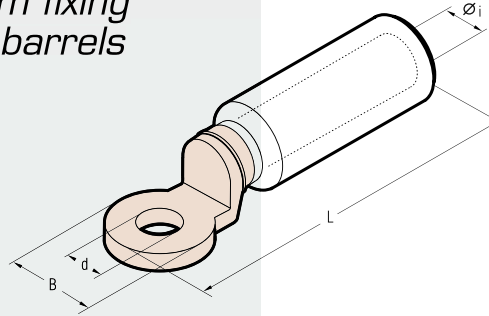

The barrels of series CAA-M connectors are made from aluminium of a purity equal to or greater than 99,5%. The barrel is friction welded to the palm thus achieving the best possible transition between the copper palm and aluminium barrel. Barrels are capped and filled with grease so as to avoid oxidation of the aluminium.

Details of the appropriate crimping tools and dies are shown on pages 191, 193.

Conductor Size sqmm	Ø Stud mm	Ref.	Dimensions mm				Quantity Box/Bag	Hydraulic Tools			
			Øi	B	L	d					
10	12	CAA 10-M 12	4,3	24	87,0	13,0	90/3	HT 131-UC RHU 131-C	B 131-UC		
16	12	CAA 16-M 12	5,5	24	87,0	13,0	90/3				
25	12	CAA 25-M 12	6,5	24	87,0	13,0	90/3				
35	12	CAA 35-M 12	8,0	24	87,0	13,0	90/3				
		CAA 35-20-M 12	8,0	24	87,0	13,0	60/3				
50	12	CAA 50-M 12	9,0	24	87,0	13,0	60/3				
70	12	CAA 70-M 12	11,0	24	87,0	13,0	60/3				
95	12	CAA 95-M 12	12,5	24	87,0	13,0	60/3				
120	12	CAA 120-M 12	13,7	31	111,0	13,0	30/3				
150	12	CAA 150-M 12	15,5	31	111,0	13,0	30/3				
185	12	CAA 185-M 12	17,0	35	116,0	13,0	24/3				
240	12	CAA 240-M 12	19,5	35	116,0	13,0	18/3				
300	12	CAA 300-34 M 12	22,5	35	120,0	13,0	15/3			HT 120 HT 131-C RHC 131	ECW-H3D
	16	CAA 300-34 M 16	22,5	35	120,0	17,0	15/3				
	16	CAA 300-M 16	23,3	35	152,5	16,5	12/3				
400	16	CAA 400-M 16	26,0	35	152,5	16,5	12/3	RHU 230-630			
500	16	CAA 500-M 16 TNBD	29,1	35	152,5	16,5	12/3				
630	8	CAA 630-4 M 8	32,5	60	192,0	4 x 9,0*	9/3				

\* 4 holes with 30 mm between axes