


**PINS**

Cable Size 0.2-0.5 sq mm			Styles Available
Dimensions			
Part No	Od2	F	
PC0.5	1.2	10	A C D E


Cable size 0.25-1.65 sq mm			Styles Available
Dimensions			
Part No	Od2	F	
PC-1.25	1.9	12.0	A B D E G
PC-1.25 F-9	1.9	9.0	A B D E

Cable Size 1.04-2.63 sq mm			Styles Available
Dimensions			
Part No	Od2	F	
PC-2	1.9	12.0	A B D E G
PC-2 F-9	1.9	9.0	A B D E

Cable Size 2.64-6.6 sq mm			Styles Available
Dimensions			
Part No	Od2	F	
PC-5.5	2.7	14.0	A B D E G

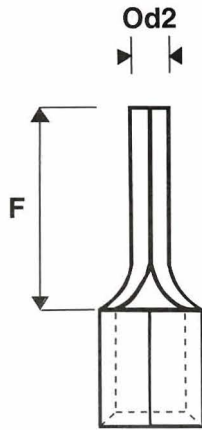

REFER TO PAGES 22-23 FOR SUITABLE TOOLING

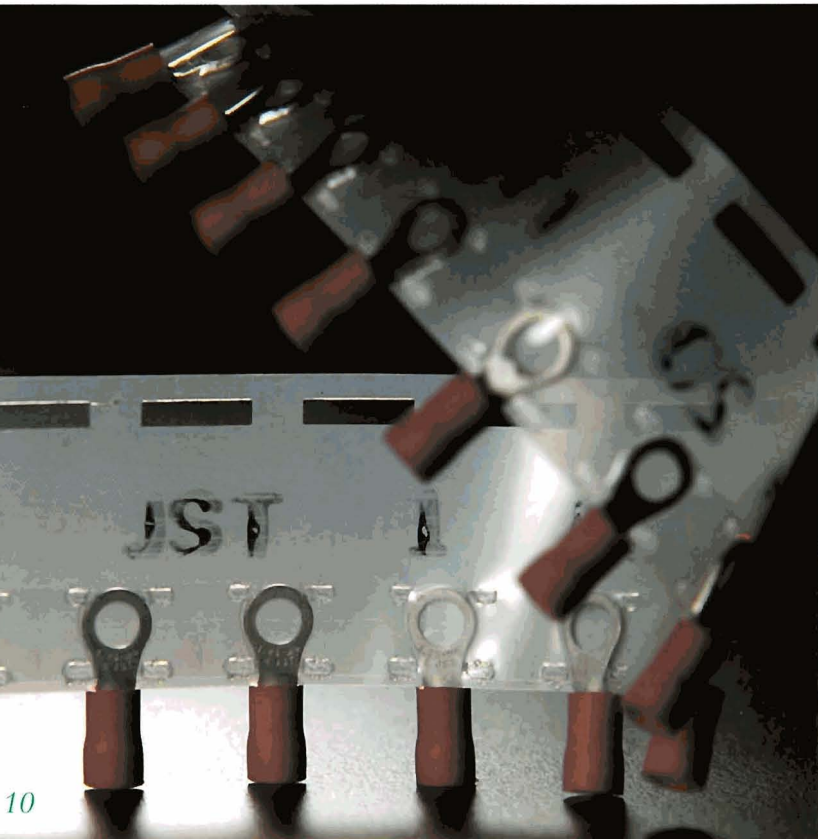

**STYLE A**  
Uninsulated



**STYLE B**  
Straight Vinyl  
Insulation  
Prefix VWS



**STYLE C**  
Straight Vinyl  
Insulation  
+ A.V. Sleeve  
Prefix VDWS



**STYLE D**  
Flared Vinyl  
Insulation Prefix  
FVWS



**STYLE G**  
Flared Nylon  
Insulation  
+ A.V. Sleeve  
Prefix FNDWS

Style Reference on page 7 for E