

MCG/MCGF

Metal Continuous Grommet



Fig. 1




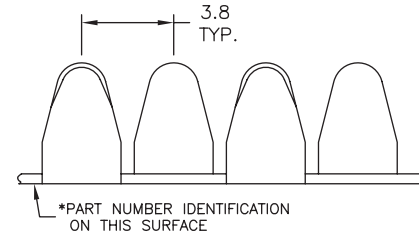


Fig. 2

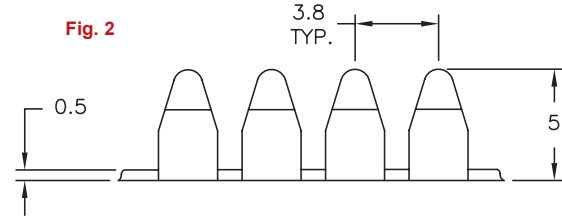


K

Features


- Dielectric Strength: 1000 volts @ 60 Hz
- Operating Temperature Range: -40°C to 140°C
- UL94 V0 flammability rating
- MCGF Series is more flexible than the MCG series because of its design.

MCG/MCGF	Material: 304 Stainless Steel, RMS-283; Coating: Nylon 11, RMS-192, Color: Black		Standard Pack: 30M Reel	
	Fig.	"T" Application Thickness	"W"	Color Code Strip, RMS-346
MCG-1N	1	0.7 - 1.1	3.6	Not Applicable
MCG-2N		1.1 - 1.4		
MCG-3N		1.4 - 1.7		
MCG-4N		1.7 - 2.3		
MCG-6N		2.9 - 3.3		
MCGF-1N	2	0.7 - 1.1	3.3	White
MCGF-2N		1.1 - 1.4		Pink
MCGF-3N		1.4 - 1.7		Yellow
Hand held cutting tool needed, order part number MCGS-1				

GROMMETS, BUSHINGS & CABLE GLANDS

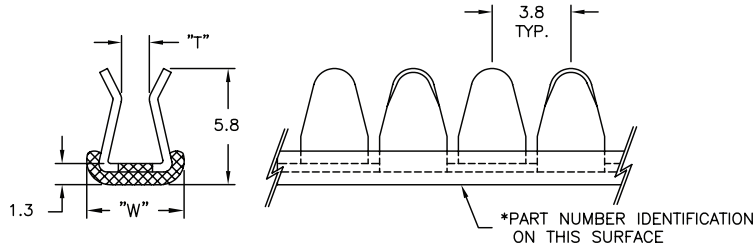

MCGG Metal Continuous Cushioned Grommet

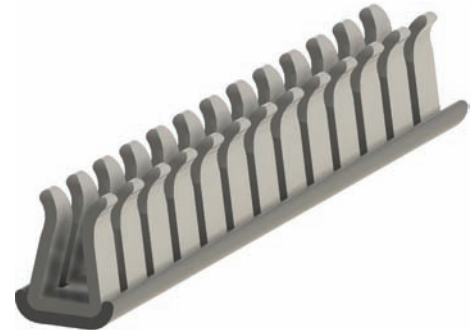

MCGG	Material: 304 Stainless Steel, RMS-283; Coating: Nylon 11, RMS-192, Color: Black; Cushion: TPE, 60 Shore D, RMS-300, Color: Black	Standard Pack: 30M Reel
	"T" Panel Thickness	"W"
MCGG-1N	0.7 - 1.1	4.8
MCGG-2N	1.1 - 1.4	
MCGG-3N	1.4 - 1.7	
MCGG-4N	1.7 - 2.3	
MCGG-6N	2.9 - 3.3	5.8
Hand held cutting tool needed, order part number MCGS-1		

Features

- Dielectric Strength: 1500Volts @ 50Hz
- Operating Temperature Range: -40°C to 85°C
- UL94 V0 flammability rating