


## UNIVERSAL VALVE LOCKOUT

THE UNIVERSAL LOCKOUT DEVICE IS A MODULAR SYSTEM WHICH ENABLES YOU TO LOCK OUT VALVES OF DIFFERENT TYPES AND SIZES. NO OTHER DEVICE OFFERS SUCH FLEXIBILITY AND SECURITY. THERE ARE TWO SIZES AVAILABLE - LARGE AND SMALL.

- Modular system makes your investment economical and flexible
- Can be used to lock out large levers, T-handles and other hard-to-secure mechanical devices
- Open-ended clamp fits over closed rings and wide handles
- Locks out valves in open and closed positions
- Made from glass filled nylon for rugged durability, chemical and corrosion resistant

Order Reference	Description	Max. Handle Thickness (mm)	Max. Valve Handle Width (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Cable Length (m)	Packaging
065403	Large Blocking Arm	31.75	41.00	9.00	20.00	-	1
065401	Large Universal Valve Lockout Base + Arm	31.75	41.00	9.00	20.00	-	1
050899	Large Universal Valve Lockout Base Clamping Unit	31.75	41.00	9.00	20.00	-	1
065402	Small Blocking Arm	19.00	25.00	9.00	20.00	-	1
065400	Small Universal Valve Lockout Base + Arm	19.00	25.00	9.00	20.00	-	1
050924	Small Universal Valve Lockout Base Clamping Unit	19.00	25.00	9.00	20.00	-	1
051395	Cable attachment with 2.44 metre sheathed cable. Cable diameter 3.25 mm	-	-	-	-	2.44	1

The modular construction of the Universal Lockout allows the user to add various accessories to make the device suitable for a range of valves. Simply disassemble the device and slot in the relevant accessory.

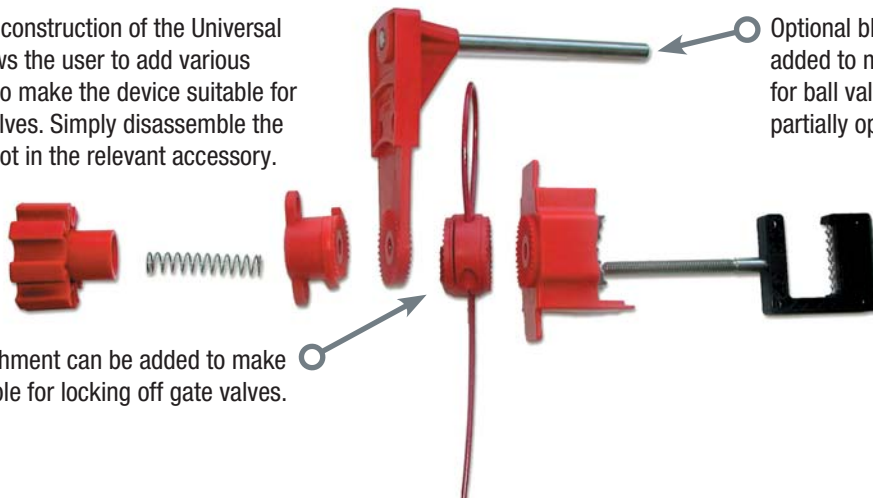

Optional blocking arm(s) can be added to make device suitable for ball valves in closed, open or partially open positions

Cable attachment can be added to make device suitable for locking off gate valves.



Clamp attaches to butterfly valve lever, preventing trigger handle from being squeezed. Valve cannot be repositioned!



Use blocking arm to lock out quarter-turn ball valves



Use cable attachment to lock out gate valves



Use two blocking arms to lockout 3-, 4- or 5-way valves, or to lock valves in the throttled position for operational control

## BRADY BALL VALVE LOCKOUT

BRADY BALL VALVE LOCKOUTS ARE THE IDEAL TOOL FOR SECURING YOUR QUARTER-TURN BALL VALVES IN THE OFF POSITION.

- Fits virtually any valve lever up to 76 mm
- Available in 2 sizes
- Service Temperature from -30°C to 120°C



Order Reference	Description	Material	Max. Handle Thickness (mm)	Max. Valve Handle Width (mm)	Size valve lever (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	# of Holes	Packaging
065666	Small Brady Ball Valve Lockout	Nylon	7.62	30.48	6 - 25	7.00	25.00	8	1
065692	Small Brady Ball Valve Lockout	Steel	6.92	30.48	6 - 25	9.53	19.00	6	1
065669	Large Brady Ball Valve Lockout	Steel	12.70	53.34	32 - 76	7.00	19.00	15	1
065693	Large Brady Ball Valve Lockout	Steel	12.70	48.26	32 - 76	9.53	19.00	7	1

## BALL VALVE LOCKOUT

VERSATILE AND EASY-TO-USE DEVICE. THE TWO HALVES OF THE DEVICE ENCOMPASS THE BALL VALVE LEVER TO SECURE IT FROM INADVERTENT ACTIVATION OF THE VALVE.

- Small device locks out pipes from 14.50 - 52.50 mm in open and closed position
- Large device locks out pipes from 50 - 200 mm in closed position
- Versatile and easy-to-use
- Made from ultra-tough polypropylene
- Service temperature from -20°C to 80°C

Order Reference	Colour	Pipe Diameter (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
<b>Small</b>					
800110	Red	14.50 - 52.50	7.24	38.00	1
805847	Blue	14.50 - 52.50	7.24	38.00	1
805848	Green	14.50 - 52.50	7.24	38.00	1
805849	Yellow	14.50 - 52.50	7.24	38.00	1
<b>Large</b>					
800111	Red	50 - 200	7.24	38.00	1
805850	Blue	50 - 200	7.24	38.00	1
805851	Green	50 - 200	7.24	38.00	1
805852	Yellow	50 - 200	7.24	38.00	1



## NON-CONDUCTIVE BALL VALVE LOCKOUT

INTUITIVE AND EASY TO PLACE SAFETY DEVICE.

- Locks quarter-turn ball valves in OFF position
- Made from strong polypropylene plastic, resistant to cracking, abrasion and chemical products
- Resistant to extreme temperature -46°C to 183°C

Order Reference	Description	Colour	Height (mm)	Width (mm)	Size valve lever (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
225340	Non-Conductive Ball Valve Lockout	Red	125.00	95.00	190 - 250	7.00	20.00	1







## ALL PURPOSE CABLE LOCKOUT

THE ERGONOMIC, HAND-FITTED BODY MAKES IT EASY TO TIGHTEN THE CABLE. CAN BE USED TO LOCK OUT VALVES, DISCONNECT SWITCHES, CIRCUIT BREAKERS AND MORE.

- Locks out multiple control points with a single device = reduced equipment costs
- Interchangeable cables, select the best type suited for the job
- High portability, a built-in eyelet helps keep the cable neatly coiled, prevents loose ends from dangling and causing a hazard when in use
- Body withstands chemicals and corrosion
- 4 Padlocks can be applied

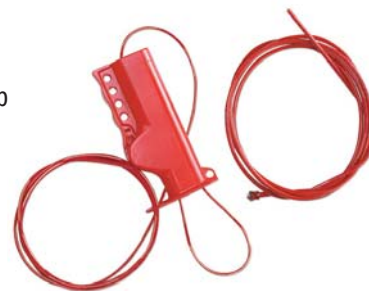

Order Reference	Specification	Material	Cable Length (m)	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Diameter (mm)	Packaging
050941	All Purpose Cable Lockout with Non-Conductive Nylon Cable	Glass-filled Polyurethane Polymer & Glass-filled Nylon & Non-Conductive Nylon	2.44	Red	7.00	20.00	3.18	1
050943	All Purpose Cable Lockout with Vinyl Coated Metal Cable	Glass-filled Polyurethane Polymer & Glass-filled Nylon & Vinyl Coated Metal	2.44	Red	7.00	20.00	3.18	1
050945	Non-Conductive Nylon Cable	Non-Conductive Nylon	2.44	Red	-	-	3.18	1
050948	Non-Conductive Nylon Cable	Non-Conductive Nylon	3.65	Red	-	-	3.18	1
050947	Vinyl Coated Metal Cable	Vinyl Coated Metal	2.44	Red	-	-	4.76	1
813642	Vinyl Coated Metal Cable	Vinyl Coated Metal	3.00	Red	-	-	4.00	1
050950	Vinyl Coated Metal Cable	Vinyl Coated Metal	3.65	Red	-	-	4.76	1

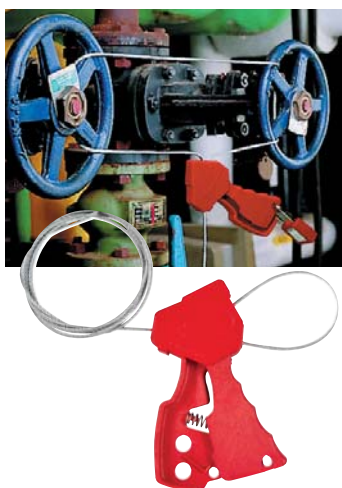

## ORIGINAL CABLE LOCKOUT

BRADY'S ORIGINAL, PATENTED CABLE LOCKOUT DEVICE IS PERFECT FOR YOUR DIFFICULT LOCKOUT SITUATIONS SUCH AS LARGE GATE VALVES OR OVERSIZED DEVICES.

- Simply squeeze device to tighten cable, insert your padlock to secure the handle and you're done!
- Body is made of impact modified nylon
- Available in several colours
- Comes with galvanised steel cable

Order Reference	Specification	Colour	Height (mm)	Width (mm)	Cable Length (m)	Packaging
045191	Original Cable Lockout	Blue	182.70	72.00	1.8	1
045192	Original Cable Lockout	Yellow	182.70	72.00	1.8	1
065318	Original Cable Lockout	Red	182.70	72.00	1.8	1
065319	Additional Cable	Silver	-	-	1.8	1
065320	Additional Cable	Silver	-	-	3.0	1



## MINI CABLE LOCKOUT

FITS IN THE PALM OF YOUR HAND AND IS EASILY STOWED AWAY IN YOUR TOOLBOX! ONE DEVICE FOR BOTH ELECTRICAL AND MECHANICAL LOCKOUT APPLICATIONS SAVES TIME AND MONEY.

- Locks out valves as well as disconnected switches and circuit breakers
- Cable stored internally: works just like a tape measure, prevents cable from getting tangled
- Push-button self-winding mechanism automatically holds cable tight
- Comes with vinyl-coated steel cable or non-conductive nylon cable
- The sheathed metal cable provides extra strength for getting a tight fit on valves and levers
- Superior chemical, corrosion and temperature resistance
- 6 Padlocks can be applied



Order Reference	Description	Cable Length (m)	Diameter (mm)	Depth (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Cable Diameter (mm)	Packaging
050940	Mini Cable Lockout with steel cable	2.44	100.00	45.00	7.00	20.00	1.60	1
051442	Mini Cable Lockout with nylon cable	2.44	100.00	45.00	7.00	20.00	1.60	1



## UNIVERSAL VALVE LOCKOUT

LOCKOUT GATE VALVES USING THE CABLE ATTACHMENT WITH THE UNIVERSAL VALVE LOCKOUT.

- Locks out valves in open and closed positions
- Flexible modular system
- Made from industrial-grade steel and nylon for rugged durability, chemical and corrosion resistance
- Open-ended clamp fits over closed rings, wide handles



Order Reference	Description	Colour	Max. Handle Thickness (mm)	Max. Valve Handle Width (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
050899	Large Universal Valve Lockout Base Clamping Unit	Red	31.75	41.00	9.00	20.00	1
050924	Small Universal Valve Lockout Base Clamping Unit	Red	19.00	25.00	9.00	20.00	1
051395	Cable attachment with 2.44 metre sheathed cable. Cable diameter 3.25 mm	Red	-	-	-	-	1

## PRO-LOCK II CABLE LOCKOUT DEVICE

THIS IS A COMPLETE ISOLATION SAFETY SYSTEM, IDEAL FOR SECURING VALVES OR INDUSTRIAL MACHINERY AND CAN ONLY BE OPENED AND LOCKED BY USING A SPECIAL TOOL.

- Polypropylene Moulding & Stainless Steel
- UV Stabilised
- Temperature resistance range: -50°C to 55°C

Other cable lengths are available upon request.



Order Reference	Specification	Colour	Cable Length (m)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Diameter (mm)	Packaging
225203	Pro-Lock device with cable	Red	1.50	6.50	20.00	50.00	1
225204	Pro-Lock device with cable	Green	1.50	6.50	20.00	50.00	1
225205	Pro-Lock device with cable	Yellow	1.50	6.50	20.00	50.00	1
225206	Operating tool	Red	-	-	-	-	1
225207	Operating tool	Green	-	-	-	-	1
225208	Operating tool	Yellow	-	-	-	-	1



## SCISSOR-LOK LOCKOUT DEVICE

LOCKS OUT MULTIPLE GATE VALVES SIMULTANEOUSLY. SECURES POWER CORDS, FREESTANDING EQUIPMENT, TANKS, CYLINDERS OR SAFETY GUARDS.

- Made of heavy-duty chemical resistant nylon
- Available with vinyl coated cable
- 3 padlocks can be applied. When using own cable, the outside diameter must be 4.76 mm or less

The cable and device can be combined in several ways (see examples).



Order Reference	Specification	Cable Length (m)	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
236921	Scissor Lok Device with Cable	.91	Yellow	7.00	19.05	1
236922	Scissor Lok Device with Cable	3.04	Yellow	7.00	19.05	1


## BRADY CABLE LOCKOUT DEVICE


LOCKS OUT GATE VALVES, GAS CYLINDERS, ELECTRICAL DEVICES AND MORE!

- Comes with steel cable and a unique hasp lockout device
- 6 padlocks can be applied.
- Service temperature from -20°C to 80°C

Do not forget to provide extra information by combining the device with a tag (see our Tags offer).

Order Reference	Specification	Cable Length (m)	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
800112	Cable Lockout Device with Cable	1.80	Red	8.00	15.00	1
800113	Additional Cable	1.80	Red	-	15.00	1
800114	Cable Lockout Device with Cable	3.00	Red	8.00	15.00	1
800115	Additional Cable	3.00	Red	-	15.00	1

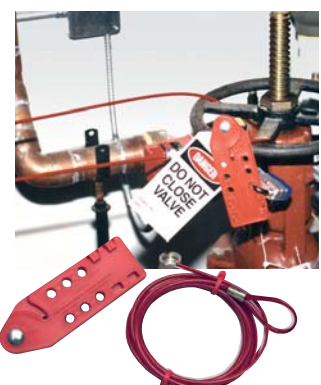



## STANDARD GATE VALVE LOCKOUT



UNIQUE KNOCKOUT FEATURE! CAN BE REMOVED BY HAND TO ACCOMMODATE "RISING STEM" GATE VALVES.

- Locks out gate valves with different hand wheel diameters
- Made of durable polypropylene – superior impact & chemical resistance
- Withstands temperatures from -20°C to 80°C
- Available in several sizes and colours

Comes with danger labels in English, Spanish and French



Order Reference	Hand Wheel Diameter (mm)	Height (mm)	Width (mm)	Depth (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
<b>Blue</b>							
065585	25 - 64	80.00	120.10	35.90	9.70	38.00	1
065586	64 - 127	141.70	184.80	50.60	9.70	38.00	1
065587	127 - 165	181.00	224.10	60.40	9.70	38.00	1
065588	165 - 254	276.20	318.30	76.20	9.70	38.00	1
065589	254 - 330	363.50	405.10	76.20	9.70	38.00	1
<b>Green</b>							
065595	25 - 64	80.00	120.10	35.90	9.70	38.00	1
065596	64 - 127	141.70	184.80	50.60	9.70	38.00	1
065597	127 - 165	181.00	224.10	60.40	9.70	38.00	1
065598	165 - 254	276.20	318.30	76.20	9.70	38.00	1
065599	254 - 330	363.50	405.10	76.20	9.70	38.00	1
<b>Red</b>							
065560	25 - 64	80.00	120.10	35.90	9.70	38.00	1
065561	64 - 127	141.70	184.80	50.60	9.70	38.00	1
065562	127 - 165	181.00	224.10	60.40	9.70	38.00	1
065563	165 - 254	276.20	318.30	76.20	9.70	38.00	1
065564	254 - 330	363.50	405.10	76.20	9.70	38.00	1
<b>Yellow</b>							
065590	25 - 64	80.00	120.10	35.90	9.70	38.00	1
065591	64 - 127	141.70	184.80	50.60	9.70	38.00	1
065592	127 - 165	181.00	224.10	60.40	9.70	38.00	1
065593	165 - 254	276.20	318.30	76.20	9.70	38.00	1
065594	254 - 330	363.50	405.10	76.20	9.70	38.00	1



### Why use different colours

- Valves in open or closed position: Red = open / Green = closed
- Indicate risk levels: Red = high risk / Blue = low risk
- Indicate substances flowing through a valve: Yellow = gas / Green = water
- Indicate different maintenance teams: Red = electricians / Blue = mechanics



### ADJUSTABLE GATE VALVE LOCKOUT

ONE DEVICE FOR MOST GATE VALVES! IT REPLACES 3 CONVENTIONAL GATE VALVE LOCKOUTS TO REDUCE YOUR COSTS.

- Adjusts to fit gate valves from 2.5 to 16.5 cm
- Durable polypropylene
- Resistant to extreme temperature changes from -20°C to 80°C




Order Reference	Description	Height (mm)	Width (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
064057	Adjustable Gate Valve Lockout	130.00	209.00	9.40	20.00	1

## BRADY BUTTERFLY VALVE LOCKOUT

IDEAL TO LOCK A BUTTERFLY VALVE IN THE OFF POSITION

- Can be used to lock a butterfly valve in the OFF position by clamping down on the handle so that it may not be engaged or moved
- Available in two sizes


Order Reference	Description	Specification	Colour	Packaging
121504	Small Butterfly Lockout	For valve handle thicknesses of 3.2 mm to 63.5 mm	Red	1
121505	Large Butterfly Lockout	For valve handle thicknesses of 50.8 mm to 102 mm	Red	1

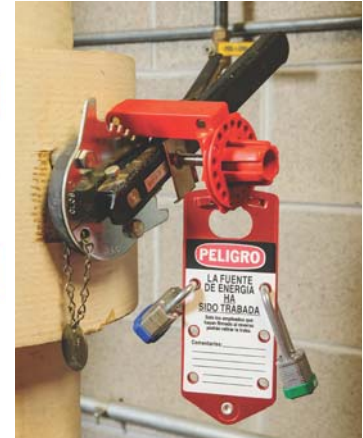

## BUTTERFLY VALVE LOCKOUT

CREATED TO SECURE YOUR BUTTERFLY VALVE EFFICIENTLY!

- Made of strong polypropylene plastic
- Fully dielectric (non-conductive)
- Highly resistant to cracking and abrasion
- Highly resistant to solvents and other chemical products
- Resistant to extreme temperature changes from -46°C to 183°C
- 2 padlocks can be applied
- Available in several colours

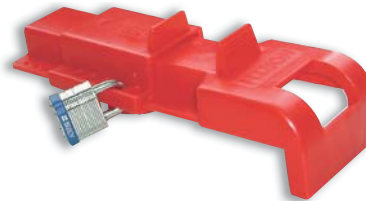


Order Reference	Description	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Height (mm)	Length (mm)	Width (mm)	Packaging
256960	Butterfly Valve Lockout	Red	8.00	25.00	70.00	305.00	102.00	1
256961	Butterfly Valve Lockout	Yellow	8.00	25.00	70.00	305.00	102.00	1
256962	Butterfly Valve Lockout	Green	8.00	25.00	70.00	305.00	102.00	1
256963	Butterfly Valve Lockout	Blue	8.00	25.00	70.00	305.00	102.00	1

## UNIVERSAL VALVE LOCKOUT


USE THE UNIVERSAL VALVE LOCKOUT FOR LOCKING OUT BUTTERFLY VALVES!

- The clamp attaches to the butterfly valve lever, preventing the trigger handle from being squeezed
- The valve cannot be repositioned
- Rugged durability, chemical and corrosion resistance

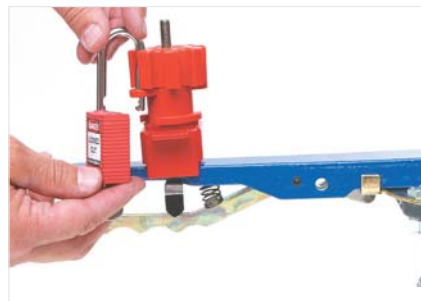

Order Reference	Description	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Max. Valve Handle Width (mm)	Max. Handle Thickness (mm)	Packaging
050899	Large Universal Valve Lockout Base Clamping Unit	Red	9.00	20.00	41.00	31.75	1
050924	Small Universal Valve Lockout Base Clamping Unit	Red	9.00	20.00	25.00	19.00	1



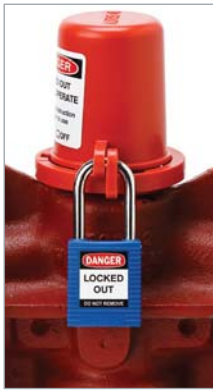

## PLUG VALVE LOCKOUT

EFFECTIVE FIT FOR DIFFICULT-TO-SECURE PLUG VALVES

- Durable and tamper-resistant
- Compact in size and easy to use
- Several sizes to fit most 25 to 203 mm diameter manually-actuated plug valves.
- Service temperatures -20°C to 80°C



Order Reference	Specification	Material	Max. Shackle Diameter (mm)	Height (mm)	Diameter (mm)	Packaging
113231	Base Cover Plug Valve Lockout 22.23 mm	Polypropylene	9.30	76.20	81.40	1
113232	Base Cover Plug Valve Lockout 34.93 mm	Polypropylene	9.30	76.20	81.40	1
113233	Base Cover Plug Valve Lockout 53.98 mm	Polypropylene	9.30	101.60	119.60	1
113234	Base Cover Plug Valve Lockout 63.50 mm	Polypropylene	9.30	101.60	119.60	1



## CYLINDER TANK LOCKOUT

REVOLUTIONARY NEW RUGGED POLYSTYRENE PLASTIC DEVICE IS USED TO LOCKOUT CYLINDER TANKS, INCLUDING PROPANE TANKS ON FORK LIFT TRUCKS AND STAND-ALONE PROPANE TANKS.

- Designed to fit in tight spaces
- Valve stem hole is 31.5 mm in diameter
- 2 padlocks can be applied.

Apply with ease to prevent access to the valve handle

Order Reference	Description	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
046139	Cylinder Tank Lockout	Red	6.50	20.00	1



## GAS CYLINDER LOCKOUT

NO NEED TO MATCH YOUR LOCKOUT DEVICE TO VARYING DIAMETERS AND THREADS OF CYLINDER CAPS.

- Prevents access to the main cylinder valve
- Accommodates neck rings up to 88 mm diameter
- Install in seconds to save time
- 1 padlock can be applied

Order Reference	Description	Height (mm)	Diameter (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
045629	Gas Cylinder Lockout	158.80	88.10	7.00	20.00	1



## PNEUMATIC QUICK-DISCONNECT LOCKOUT

ISOLATES PNEUMATIC ENERGY WITHOUT THE EXPENSE AND INCONVENIENCE OF INSTALLING IN-LINE LOCKOUT VALVES.

- Device is applied to the male fitting, isolating equipment from all compressed air sources.
- Accommodates the majority of 6 mm, 9 mm and 12 mm male fittings
- Hole in centre of device allows for permanent storage on air hose and a loop on the side can be used to hang the hose and lockout device

Order Reference	Description	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
064221	Pneumatic Quick-Disconnect Lockout	Red	7.84	20.00	1
065645	Pneumatic Quick-Disconnect Lockout	Red	7.84	20.00	6

